radwag.com

MWLH 30 Electromagnetic Compensation Weighing Module

WX-016-0110

More information on the website
mirror.radwag.com/en/info,w1,6RX



The drawings, photos and graphics used are for illustrative purposes only.

Datasheet

Metrological parameters	
Maximum capacity [Max]	30 kg
Minimum load	5 g
Preload range	3 kg
Readability [d]	0.1 g
Tare range	-30 kg
Repeatability	0.1 g
Linearity	±0.3 g
Stabilization time	2 s
Adjustment	external
Construction	
Protection class	IP 65
Electrical parameters	
Power supply	100 – 240 V AC 50/60 Hz

Environmental conditions	
Operating temperature	+10 – +40 °C
Relative humidity	15% – 80%

Physical parameters	
Weighing pan dimensions	212×174 mm
Device dimensions W x D x H	341×236×164 mm
Packaging dimensions W x D x H	580×413×360 mm

Accessories (Additional Fee)


Ethernet cables (scale - Ethernet)
RS 232, RS 485 cables
IN/OUT Cables

Powerbanks
RS 232 – USB Converter

Software (Additional Fee)

- MWMH Manager [WX-010-0103]
- R-Lab [WX-010-0080]
- RADWAG Development Studio [WX-010-0104]
- RAD Key [WX-010-0005]
- Scale Editor 2.1 [WX-010-0173]

Device dimensions W x D x H

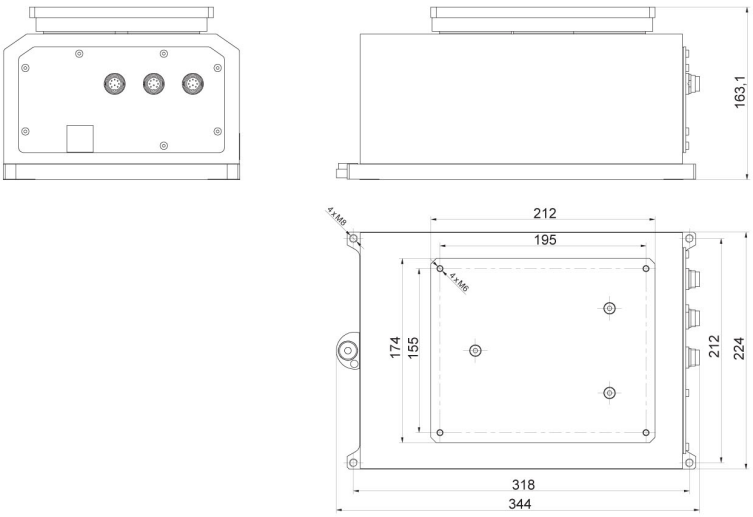

MWLH