

WAY 4Y.KO Mass Comparator

Class-leading manual mass comparator




WAY 100.4Y.KO




WAY 500.4Y.KO



WAY 5.4Y.KO



Anti-draft chamber made of glass reduces the influence of air drafts on comparison procedure



External supplementary loads for comparison of non-standard weights

Functions

- 

Mass comparator
- 

Ambient conditions measurement
- 

Proximity sensors
- 

Replaceable units
- 

Multilingual menu

Features

Effective and Excellent Measurement

The WAY 4Y.KO series stands for a class-leading automatic mass comparator. The series enables comparison of weights ranging from 1 mg to 5 kg for class E1.

Excellent Measurement Repeatability

The WAY 4Y.KO mass comparator is equipped with a spacious weighing chamber made of glass and a ring-shaped draft shield. Mass comparators of higher accuracy feature an internal glass anti-draft chamber minimizing the influence of ambient conditions on measurement result.

Design and Functionality







The ring-shaped draft shield, apart from protecting the load against air drafts, prevents potential shocks that may occur during weighing pan loading. The weighing pan made of top-class non-magnetic stainless steel features marking facilitating centric loading of weights.

Anti-draft chamber made of glass reduces the influence of air drafts on comparison process. With use of conductive coating, the glass enables discharge of electrostatic charges.

Dedicated Software

Specially designed RMCS computer software enables comprehensive realisation of calibration procedures in laboratory. The system manages the whole calibration process, starting from the moment the order is placed, through procedure performance, to the moment of issuing the calibration certificate.







Technical Specifications

		WAY 100.4Y.KO	WAY 500.4Y.KO	WAY 1.4Y.KO
OIML calibration range E1		5 g ÷ 100 g	200 g ÷ 500 g	500 g ÷ 1 kg
OIML calibration range E2		100 mg ÷ 100 g	10 g ÷ 500 g	100 g ÷ 1 kg
OIML calibration range F1		1 mg ÷ 100 g	1 mg ÷ 500 g	10 g ÷ 1 kg
OIML calibration range F2		1 mg ÷ 100 g	1 mg ÷ 500 g	1 g ÷ 1 kg
OIML calibration range M1		1 mg ÷ 100 g	1 mg ÷ 500 g	1 g ÷ 1 kg
OIML calibration range M2		1 mg ÷ 100 g	1 mg ÷ 500 g	1 g ÷ 1 kg
Maximum capacity [Max]		110 g	520 g	1.02 kg
Readability [d]		0.001 mg	0.01 mg	0.01 mg
Repeatability for nominal load*		0.003 mg (100 g)	0.02 mg (500 g)	0.035 mg (1 kg)
Repeatability for small load*		0.003 mg (100 mg)	0.02 mg (100 mg)	0.035 mg (1 g)
Stabilization time		30 s	30 s	30 s
Adjustment		external	external	external
Electric compensation range		- 1 g ÷ 10 g	- 10 g ÷ 20 g	- 10 g ÷ 20 g
Internal supplementary weights		semi-automatic	semi-automatic	semi-automatic
External supplementary weights		10 g	30 g, 2 × 10 g	50 g, 30 g, 2 × 10 g
Eccentricity (for test weight)		1 d / 1 mm	1 d / 1 mm	1 d / 1 mm
Display		5.7" colour resistive touch screen	5.7" colour resistive touch screen	5.7" colour resistive touch screen
Keypad		8 keys	8 keys	8 keys
Ingress protection - indicator		IP 43	IP 43	IP 43
Touch-free operation		2 programmable sensors	2 programmable sensors	2 programmable sensors
USB-A		2	2	2
Ethernet		10 / 100 Mbit	10 / 100 Mbit	10 / 100 Mbit
RS 232		2	2	2
Wireless Connection		802.11 b/g/n	802.11 b/g/n	802.11 b/g/n
IN/OUT		4 × IN, 4 × OUT	4 × IN, 4 × OUT	4 × IN, 4 × OUT
Power supply		110 ÷ 230 V AC / 50 ÷ 60 Hz	110 ÷ 230 V AC / 50 ÷ 60 Hz	110 ÷ 230 V AC / 50 ÷ 60 Hz
Operating temperature		+15 ÷ +30 °C	+15 ÷ +30 °C	+15 ÷ +30 °C
Operating temperature change rate		±0.5 °C / 12 h (± 0.3 °C / 4 h)	±0.5 °C / 12 h (± 0.3 °C / 4 h)	±0.5 °C / 12 h (± 0.3 °C / 4 h)
Relative humidity variations		±3% / 4 h	±3% / 4 h	±3% / 4 h
Relative humidity***		40 ÷ 60%	40 ÷ 60%	40 ÷ 60%
Transport and storage temperature		-20 ÷ +50 °C	-20 ÷ +50 °C	-20 ÷ +50 °C
Weighing pan dimensions		ø 30 mm	ø 50 mm	ø 60 mm
Mass comparator dimensions**		385 × 525 × 217 mm	385 × 525 × 217 mm	385 × 525 × 217 mm
Indicator dimensions**		206 × 140 × 71 mm	206 × 140 × 71 mm	206 × 140 × 71 mm
Anti-draft chamber dimensions**		560 × 565 × 340 mm	560 × 565 × 340 mm	560 × 565 × 340 mm
Mass comparator net weight		21.5 kg	22.5 kg	23 kg
Mass comparator gross weight		31.5 kg	35.5 kg	33 kg
Anti-draft chamber net weight		14 kg	14 kg	14 kg
Anti-draft chamber gross weight		24 kg	24 kg	24 kg
Mass comparator packaging dimensions**		860 × 750 × 570 mm	860 × 750 × 570 mm	860 × 750 × 570 mm
Anti-draft chamber packaging dimensions**		860 × 830 × 840 mm	860 × 830 × 840 mm	860 × 830 × 840 mm

* repeatability is expressed as a standard deviation determined for 6 ABBA cycles

** dimensions: length x width x depth

*** non-condensing conditions


	WAY 2.4Y.KO	WAY 5.4Y.KO
OIML calibration range E1	 1 kg ÷ 2 kg	2 kg ÷ 5 kg
OIML calibration range E2	 500 g ÷ 2 kg	500 g ÷ 5 kg
OIML calibration range F1	 100 g ÷ 2 kg	100 g ÷ 5 kg
OIML calibration range F2	 10 g ÷ 2 kg	10 g ÷ 5 kg
OIML calibration range M1	 1 g ÷ 2 kg	1 g ÷ 5 kg
OIML calibration range M2	 1 g ÷ 2 kg	1 g ÷ 5 kg
Maximum capacity [Max]	2.3 kg	5.05 kg
Readability [d]	0.1 mg	0.1 mg
Repeatability for nominal load*	0.1 mg (2 kg)	0.2 mg (5 kg)
Repeatability for small load*	0.1 mg (1 g)	0,2 mg (1 g)
Stabilization time	20 s	20 s
Adjustment	external	external
Electric compensation range	-50 g ÷ 300 g	-10 g ÷ 50 g
Internal supplementary weights	semi-automatic	semi-automatic
External supplementary weights	2 x 100 g	500 g, 300 g, 100 g, 50 g, 30 g, 2 x 10g
Eccentricity (for test weight)	1 d / 1 mm	1 d / 1 mm
Display	5.7" colour resistive touch screen	5.7" colour resistive touch screen
Keypad	8 keys	8 keys
Ingress protection - indicator	IP 43	IP 43
Touch-free operation	2 programmable sensors	2 programmable sensors
USB-A	2	2
Ethernet	10 / 100 Mbit	10 / 100 Mbit
RS 232	2	2
Wireless Connection	802.11 b/g/n	802.11 b/g/n
IN/OUT	4 x IN, 4 x OUT	4 x IN, 4 x OUT
Power supply	110 ÷ 230 V AC / 50 ÷ 60 Hz	110 ÷ 230 V AC / 50 ÷ 60 Hz
Operating temperature	+15 ÷ +30 °C	+15 ÷ +30 °C
Operating temperature change rate	±0.5 °C / 12 h (± 0.3 °C / 4 h)	±0.5 °C / 12 h (± 0.3 °C / 4 h)
Relative humidity variations	±3% / 4 h	±3% / 4 h
Relative humidity***	40 ÷ 60%	40 ÷ 60%
Transport and storage temperature	-20 ÷ +50 °C	-20 ÷ +50 °C
Weighing pan dimensions	ø 70 mm	ø 90 mm
Mass comparator dimensions**	385 x 525 x 217 mm	385 x 345 x 217 mm
Indicator dimensions**	206 x 140 x 71 mm	206 x 140 x 71 mm
Anti-draft chamber dimensions**	560 x 565 x 340 mm	560 x 565 x 340 mm
Mass comparator net weight	24.5 kg	24 kg
Mass comparator gross weight	34.5 kg	34 kg
Anti-draft chamber net weight	14 kg	14 kg
Anti-draft chamber gross weight	24 kg	24 kg
Mass comparator packaging dimensions**	860 x 750 x 570 mm	860 x 750 x 570 mm
Anti-draft chamber packaging dimensions**	860 x 830 x 840 mm	860 x 830 x 840 mm

* repeatability is expressed as a standard deviation determined for 6 ABBA cycles


** dimensions: length x width x depth

*** non-condensing conditions



Dimensions

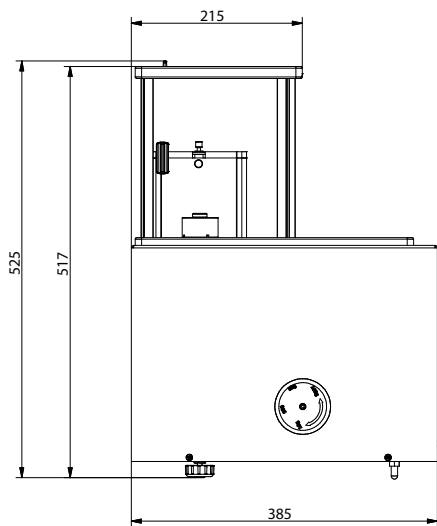

WAY 100.4Y.KO

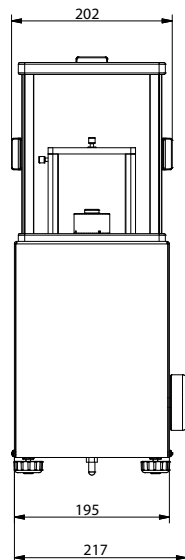

WAY 500.4Y.KO, WAY 1.4Y.KO,
WAY 2.4Y.KO

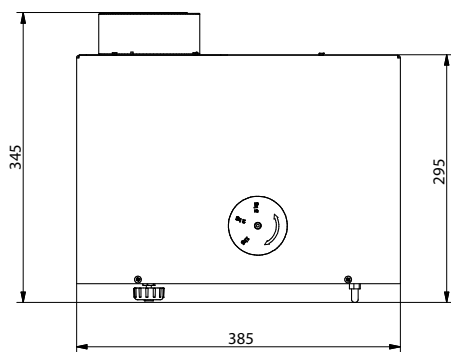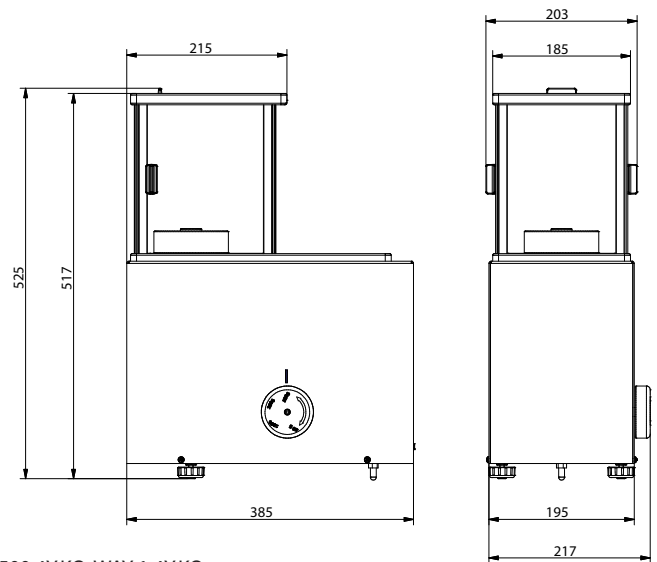

WAY 5.4Y.KO

Accessories

Weighing Tables

- granite anti-vibration table

Ambient Conditions

- THB-S or THB-P sensor

Peripheral Devices

- Epson dot matrix printer
- barcode scanner

Cables, Converters

- RS-232 – P0108 computer cable
- RS-232 – P0167 computer cable
- RS-232 – P0151 Epson printer cable

Electrical Accessories

- power supply with ZR-02 battery

Dedicated Software

RMCS System

- performance of calibration procedures in a laboratory from the moment the order is placed, to the moment of issuing a calibration certificate
- compatible with THB sensors enabling recording ambient conditions
- export of report results to various files
- archiving calibration protocols, orders, certificates and ambient conditions

RADWAG Remote Desktop

- remote control of the mass comparator using computer, telephone or tablet
- sending text messages
- version for Windows 10 and Android systems

R-LAB

- collecting measurements
- carrying out statistical analysis of measurements
- customized graphs and reports

Parameters Editor

- remote change of parameters
- remote on-line preview of the display
- displaying current mass indication
- software update
- file loading, editing and saving parameters to a file
- import and export of parameters
- interfaces: RS232, Ethernet and Wireless Connection
- quick and easy edition of balance parameters using computer