

Large-Size LCD Displays

Accessory for load cell scales.



WWG 2/2
- stainless steel housing



WWG 2/2
- 6 digits of 11.2 cm height

Features

Robust and Resistant Stainless Steel Housing

The WWG-2 LCD display is housed in a stainless steel housing, which enables its operation in harsh industry conditions. The display can be installed on the table top or mounted on the wall. The WWG-2 LCD features white diode backlight and clear display indicating digits of 4.5" (11.2cm) height.

Communication

Communication with indicators (weighing instruments) is carried out via RS22 or RS485 connectors. Depending on the installation option, the display is powered by 230VAC or 7-24VAC.

Compatible with

WWG-2/2:

- PUE C41H indicator

WWG-2/3:

- PUE C/31H indicator

WWG-2/4:

- PUE C41H indicator
- PUE HY10 indicator
- PUE 5.15 and PUE 5.19 indicators
- PUE HX7 indicator

WWG-2/5:

- PUE 7.1 indicator
- PUE C32 indicator


WWG-2/7:

- PUE C/31 indicator

Dane techniczne

| | WWG 2/2 | WWG 2/3 | WWG 2/4 | WWG 2/5 | WWG 2/7 |
|-------------------------------------|-----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Construction material | stainless steel | stainless steel | stainless steel | stainless steel | stainless steel |
| Wielkość cyfr | 4,5" (11,2 cm) | 4,5" (11,2 cm) | 4,5" (11,2 cm) | 4,5" (11,2 cm) | 4,5" (11,2 cm) |
| Przeznaczony do miernika | PUE C/41H | PUE C/31H | PUE C41H, PUE HY, PUE 5 | PUE 7 | PUE C/31 |
| Komunikacja | RS 485 | RS 232 | RS 232 | RS 232 | RS 232 |
| Długość przewodu sygnałowego | 5 m (max 150m as option) | 3 m (max 10m as option) | 3 m (max 10m as option) | 3 m (max 10m as option) | 3 m (max 10m as option) |
| Power supply | 230 VAC | 230 VAC | 230 VAC | 230 VAC | 230 VAC |
| Operating temperature | -20 ÷ 40°C | -20 ÷ 40°C | -20 ÷ 40°C | -20 ÷ 40°C | -20 ÷ 40°C |
| Protection class | IP 66/67 | IP 66/67 | IP 66/67 | IP 66/67 | IP 66/67 |
| Dimensions (bez uchwyty) | 635×195×48 mm | 635×195×48 mm | 635×195×48 mm | 635×195×48 mm | 635×195×48 mm |
| Net / Gross weight | 5,5 kg / 7 kg | 5,5 kg / 7 kg | 5,5 kg / 7 kg | 5,5 kg / 7 kg | 5,5 kg / 7 kg |
| Packaging dimensions | | | | | |

Dimensions

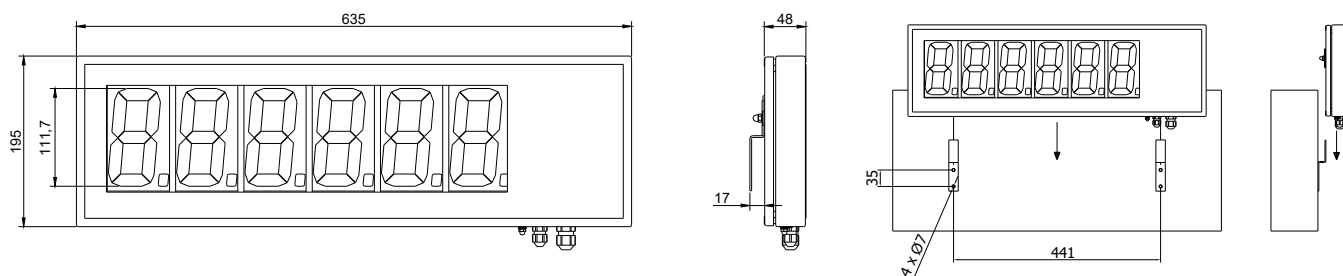

WWG